



OCEAN DEEP

SHINE THE WORLD





Welcome to Ocean Deep, a leading LED lighting solution provider based in Palghar, Maharashtra. We specialize in energy-efficient, high-performance LED lights for residential, commercial, and industrial needs. Guided by our visionary proprietor, Mr. Shyam Tiwari, we focus on innovation, quality, and sustainability. Our lights are crafted to enhance ambiance, boost efficiency, and support a greener future. At Ocean Deep, lighting is more than illumination—it's about creating lasting experiences. With a commitment to customer satisfaction and eco-friendly practices, we aim to set new benchmarks in the LED industry. Discover brilliance with Ocean Deep—lighting that's smart, reliable, and built to shine.



Dear Customer,

Thank you for expressing interest in Ocean Deep Lighting Solutions.

Within this catalogue, you'll discover a brilliant collection of lighting innovations — from stylish indoor luminaires and elegant architectural lights to cutting-edge outdoor solutions designed to transform any space. Every product is thoughtfully designed and built with precision to offer unmatched performance, elegance, and reliability. It's a promise rooted in excellence, inspired by innovation, and powered by a passion for illumination.

So go ahead — explore, imagine, and let your world shine with Ocean Deep.

Happy exploring!

Team Ocean Deep



INDOOR LIGHTS

PRODUCT NAME	PAGE NO.
DELTA SPOT LIGHT	1
JAZZ SPORTLIGHT	3
GLANZA (Front Openable)	5
GLANZA (Square)	7
GLANZA (Trimless)	8
ECO SPOTLIGHT (Front Openable)	9
FB COB WALL WASHER	10
DUKE GIMBAL	11
SWIFT HONEYCOMB	13
SUNFLOWER	15
TRACK LIGHT	17
LASER PRO	20
TILTABLE LASER BLADE	21
PULLOUT LIGHT	22
LINEAR LIGHT	23
LED SPOTLIGHT (Moveable)	28
SURFACE SQUARE COB	29
SURFACE ROUND COB	30
360° ADJUSTABLE SURFACE COB	32
PANEL LIGHT	33



OUTDOOR LIGHTS

PRODUCT NAME	PAGE NO.
OUTDOOR WALL LIGHT	39
INGROUND LIGHT	45
UNDER WATER LIGHT	47
WALL WASHER	49
AQUA IP65	51
BOLLARD LIGHT	53
LED BOLLARD LIGHT	55
UPLIGHTER	57
OUTDOOR LIGHTING	58
LED PATHWAY LIGHT	59
BOLLARD LAMP	61
GARDEN LIGHT	68
LED STEP LIGHT	73
SPIKE LIGHT	76



INDOOR



LIGHTS


DELTA SPOT LIGHT



WIFI CONTROLLER



REMOTE CONTROLLER



APPLICATION CONTROLLER

DELTA SPOT LIGHTS



Light Source & Components

- LED Type: CREE/BRIDGELUX
- Driver Compatibility: FULHAM, PHILIPS OSRAM
- Color Temperature Options: 2700 K/3000K/4000k/6500 K
- Lumen Efficiency: 120-140 lm/W
- Beam Angle Choices: 24°/36°/60°
- Material: Premium-Grade Aluminum Die Casting

Product Variants

Model No.	Wattage	Dimensions	Cutout
OD-CD-001	7 W	69 X 70 MM	65 MM
OD-CD-002	12 W	83 X 80 MM	75 MM
OD-CD-003	18 W	100 X 95 MM	90 MM

Finishes & Colors


Body Cover Options: White / Grey / Golden / Rose Gold /
Chrome / Shining Black

Body Color Choices: White / Black

Heatsink Color: Grey



JAZZ SPORTLIGHT






Product Variants


Model	Wattage	Dimensions	Height	Cutout
OD-CD-019	5-8W	62MM	59MM	55MM
OD-CD-020	10-12W	85MM	64MM	75MM
OD-CD-021	15-18W	105MM	72MM	95MM
OD-CD-022	18-22W	130MM	73MM	115MM
OD-CD-023	25-35W	170MM	80MM	145MM
OD-CD-024	40-50W	195MM	85MM	170MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- LENS: HERCULUX
- LUMEN EFFICIENCY: 120-140 LM/W
- RING COLOUR: WHITE / MATT BLACK / GOLD / ROSE GOLD / CHROME / SHINING BLACK
- BODY COLOUR: WHITE / BLACK
- LED BEAM ANGLE: 24° / 36° / 55°
- MATERIAL: ALUMINIUM DIE CASTING



GLANZA (Front Openable)

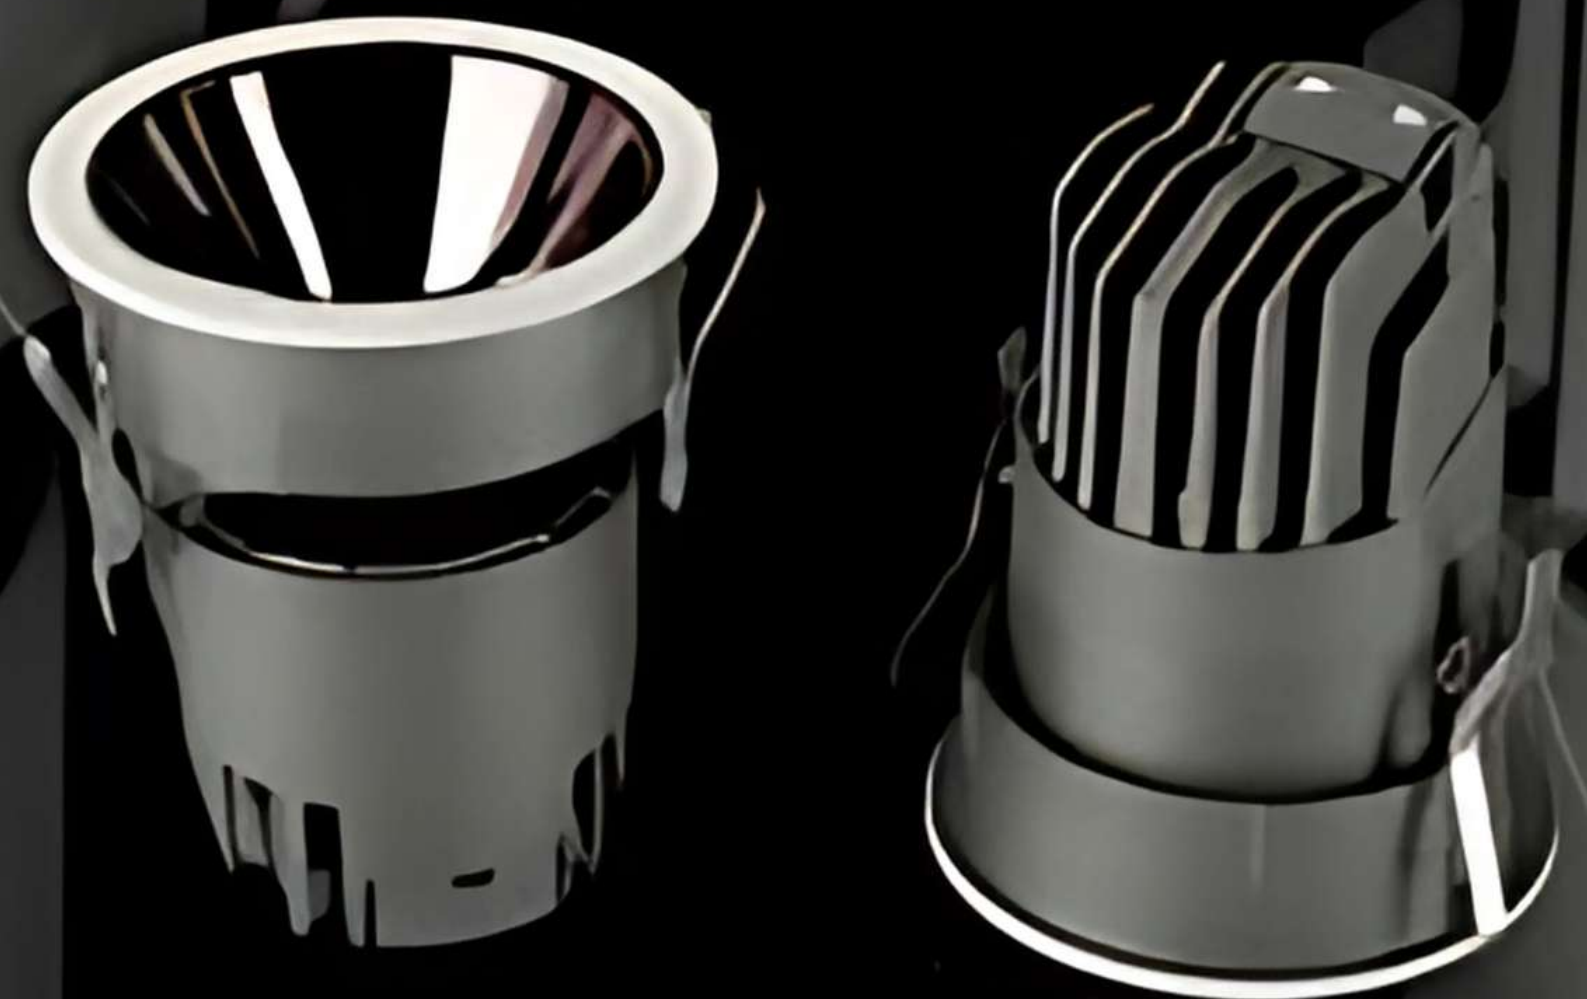

GLANZA



GLANZA (Front Openable)




Product Variants

Model	Wattage	Dimensions	Height	Cutout
OD-CD-004	6-8W	65MM	78MM	55MM
OD-CD-005	10-15W	85MM	101MM	75MM
OD-CD-006	18-20W	105MM	110MM	95MM
OD-CD-007	25-30W	105MM	121MM	95MM
OD-CD-008	32-40W	135MM	142MM	120MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- OPTICS: HERCULUX
- LUMEN EFFICIENCY: 120-140 LM/W
- RING COLOUR: WHITE / MATT BLACK / GOLD / ROSE GOLD / CHROME / SILVER / PEARL SHINING BLACK
- CRI: 80 / 90
- HEATSINK COLOUR: GREY
- BEAM ANGLE: 15° / 24° / 36° / 55°
- 5° AVAILABLE IN 75mm CUTOUT



GLANZA (Square)




Product Variants

Model No.	Wattage	Dimensions	Height	Cutout
OD-CD-011	6-8W	65 X 65MM	85MM	55 X 55MM
OD-CD-012	12-15W	85 X 85MM	111MM	75 X 75MM
OD-CD-013	15-20W	105 X 105MM	124MM	95 X 95MM
OD-CD-014	25-30W	105 X 105MM	135MM	95 X 95MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- OPTICS: HERCULUX
- LUMEN EFFICIENCY: 120-140 LM/W
- RING COLOUR: WHITE / MATT BLACK / GOLD / ROSE GOLD / CHROME / SILVER / PEARL SHINING BLACK
- CRI: 80 / 90
- HEATSINK COLOUR: GREY
- BEAM ANGLE: 15° / 24° / 36° / 55°
- 5° AVAILABLE IN 75mm CUTOUT



GLANZA (Trimless)




Product Variants

Model No.	Wattage	Dimensions	Height	Cutout
OD-CD-015	6-8W	65 X 65MM	85MM	58 X 55MM
OD-CD-016	12-15W	85 X 85MM	111MM	78 X 75MM
OD-CD-017	15-20W	105 X 105MM	124MM	98 X 95MM
OD-CD-018	25-30W	95 X 95MM	135MM	98 X 95MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- OPTICS: HERCULUX
- LUMEN EFFICIENCY: 120-140 LM/W
- RING COLOUR: WHITE / MATT BLACK / GOLD / ROSE GOLD / CHROME / SILVER / PEARL SHINING BLACK
- CRI: 80 / 90
- HEATSINK COLOUR: GREY
- BEAM ANGLE: 15° / 24° / 36° / 55°
- 5° AVAILABLE IN 75mm CUTOUT



ECO SPOTLIGHT (Front Openable)




Product Variants

Model No.	Wattage	Dimensions	Height	Cutout
OD-CD-025	6-8W	80MM	77MM	55MM
OD-CD-026	10-12W	85MM	78MM	7MM
OD-CD-027	15-18W	110MM	103MM	95MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- LUMEN EFFICIENCY: 120-140 LM/W
- RING COLOUR: WHITE / MATT BLACK / GOLD / ROSE GOLD / CHROME / SILVER / SHINING BLACK
- BODY COLOUR: WHITE / BLACK
- LED BEAM ANGLE: 36°
- MATERIAL: ALUMINIUM DIECASTING



FB COB WALL WASHER



Product Variants


Model No.	Wattage	Dimensions	Height	Cutout
OD-CD-028	12W	85MM	74MM	75MM
OD-CD-029	15W	85MM	74MM	75MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- SHINLAND LENS: 7W/12W-
- LUMEN EFFICIENCY: 120-140 LM/W
- RING COLOUR: CHROME
- HEATSINK COLOUR: BLACK
- MATERIAL: ALUMINIUM DIE CASTING



DUKE GIMBAL

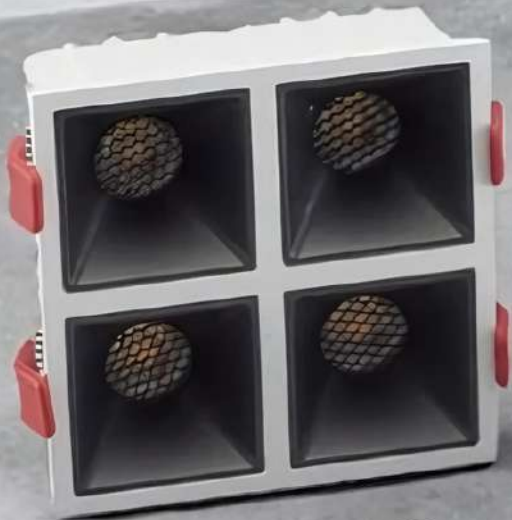

DUKE GIMBAL




Product Variants

Model No.	Wattage	W X L	Height	Cutout
OD-CD-030	7W	65 X 65MM	52MM	55 X 55MM
OD-CD-031	7X2W	65 X 126MM	52MM	55 X 115MM
OD-CD-032	7X3W	65 X 187MM	52MM	55 X 175MM
OD-CD-033	7X4W	126 X 126MM	52MM	115 X 115MM
OD-CD-034	12W	85 X 85MM	63MM	75 X 75MM
OD-CD-035	12X2W	85 X 167MM	63MM	75 X 160MM
OD-CD-036	12X3W	85 X 252MM	63MM	75 X 240MM
OD-CD-037	12X4W	165 X 165MM	63MM	150 X 150MM
OD-CD-038	20X2W	105 X 208MM	77MM	95 X 195MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- REFLECTOR: GR
- LED BEAM ANGLE: 24° / 40° / 60°
- LUMEN EFFICIENCY: 130 LM/W
- RING COLOUR: BLACK
- BODY COLOUR: WHITE / BLACK



WIFI CONTROLLER REMOTE CONTROLLER APPLICATION CONTROLLER

SWIFT HONEYCOMB



SWIFT HONEYCOMB




Product Variants

Model No.	Wattage	Dimensions	Height	Cutout
OD-CD-043	6-10W	85MM	50MM	75MM
OD-CD-044	10-15W	100MM	60MM	92MM
OD-CD-045	15-20W	125MM	73MM	115MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- BEAM ANGLE: 40°
- LUMEN EFFICIENCY: 120-140 LM/W
- RING COLOUR: WHITE / MATT BLACK / SHINING BLACK/
CHROME/ ROSE GOLD
- HEATSINK COLOUR: BLACK / WHITE
- MATERIAL: ALUMINIUM DIE CASTING



WIFI CONTROLLER REMOTE CONTROLLER APPLICATION CONTROLLER

SUNFLOWER






Product Variants

Model No.	Wattage	Dimensions	Height	Cutout
OD-CD-046	6-8W	70MM	50MM	65MM
OD-CD-047	12-15W	85MM	65MM	75MM
OD-CD-048	15-20W	95MM	75MM	90MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- BEAM ANGLE: 36°
- LUMEN EFFICIENCY: 120-140 LM/W
- RING COLOUR: WHITE / SHINING BLACK/ CHROME / GOLD / ROSE GOLD
- HEATSINK COLOUR: BLACK / WHITE
- MATERIAL: ALUMINIUM DIE CASTING



TRACK LIGHT



TRACKLIGHT



Product Variants



Model No.	Wattage	Dimensions	Height
OD-CD-057	6 - 10W	50MM	135MM
OD-CD-058	15 - 20W	60MM	150MM
OD-CD-059	25 - 30W	80MM	180MM
OD-CD-060	30 - 40W	80MM	195MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 4000K / 6500K
- CHANNEL: 2/3 WIRE
- LUMEN EFFICIENCY: 130 LM/W
- REFLECTOR COLOR: DRAKOO / INDIAN
- LED BEAM ANGLE: 24° / 36° / 60°
- BODY COLOR: WHITE / BLACK

TRACKLIGHT COLOR RING



Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 4000K / 6500K
- CHANNEL: 2/3 WIRE
- LUMEN EFFICIENCY: 130 LM/W
- LED BEAM ANGLE: 36°
- BODY COLOR: WHITE / BLACK
- RING COLOR: WHITE / SHINING BLACK / ROSE GOLD / CHROME

Product Variants

Model No.	OD-CD-061
Wattage	25 - 30W
Dimensions	80MM
Height	180MM



WIFI CONTROLLER REMOTE CONTROLLER APPLICATION CONTROLLER

GLORIA TRACKLIGHT



Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 4000K / 6500K
- CHANNEL: 2/3 WIRE
- LUMEN EFFICIENCY: 130 LM/W
- LED BEAM ANGLE: 36°
- BODY COLOR: WHITE / BLACK
- RING COLOR: WHITE / SHINING BLACK / ROSE GOLD / CHROME
- MATERIAL: ALUMINUM DIE CASTING

Product Variants

Model No.	OD-CD-062
Wattage	15 - 24W
Dimensions	70MM
Height	150MM






Product Variants

Model No.	Wattage	Dimensions	Height	Cutout
OD-CD-049	5W	60 X 60MM	60MM	50 X 50MM
OD-CD-050	5X2W	105 X 60MM	60MM	95 X 50MM
OD-CD-051	5X3W	148 X 60MM	60MM	135 X 50MM
OD-CD-052	5X4W	191 X 50MM	60MM	181 X 50MM
OD-CD-053	5X4W	105 X 105MM	60MM	95 X 95MM

Additional Specifications

- LED: BRIDGELUX / CREE
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700 K / 3000K / 4000K / 5000K
- OPTIC: 15° 24° 36°
- CRI: Ra>90
- REFLECTOR COLOR: BLACK/ ROSE GOLD
- LED BEAM ANGLE: 36°
- MATERIAL: ALUMINUM DIE CASTING



TILTABLE LASER BLADE




Product Variants

Model No.	Model	Wattage	Dimensions	Cutout
OD-CD-054	3 WAY	6W	L122 X W26 X H80	78 X 43MM
OD-CD-055	12 WAY	12W	L230 X W26 X H80	136 X 43MM

Additional Specifications

- LED: BRIDGELUX / CREE
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 3000K / 4000K / 6000K
- LUMEN FLUX: 480LM / 950LM
- REFLECTOR COLOR: BLACK
- LED BEAM ANGLE: 24°
- BODY COLOR: WHITE / BLACK
- MATERIAL: ALUMINUM DIE CASTING



PULLOUT LIGHT




Additional Specifications


- LED: BRIDGELUX /CREE
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- LUMEN EFFICIENCY: 120 - 140 LM/W
- REFLECTOR: GR / SHINLAND
- LED BEAM ANGLE: 38°
- BODY COLOR: WHITE / BLACK
- MATERIAL: ALUMINUM DIE CASTING




Product Variants

Model No.	Wattage	Dimension	Cutout
OD-CD-085	7W	Ø61.6 X H79.1 MM	Ø55 MM
OD-CD-086	2 X 7W	L129.5 X W68.5 X H84 MM	L120XW55 MM
OD-CD-176	12W	Ø84 X H100.5 MM	Ø75MM
OD-CD-177	2 X 12W	L180 X W90.5 X H111.7 MM	L165XW75 MM



LINEAR LIGHT



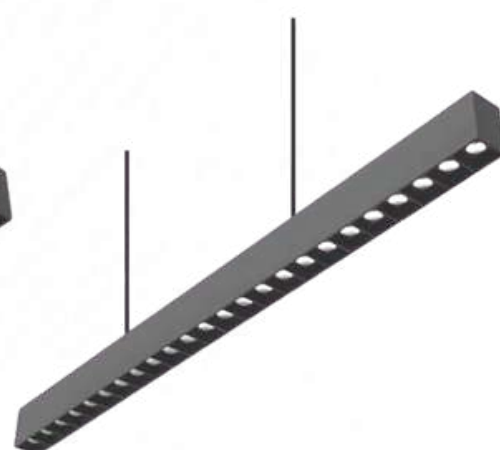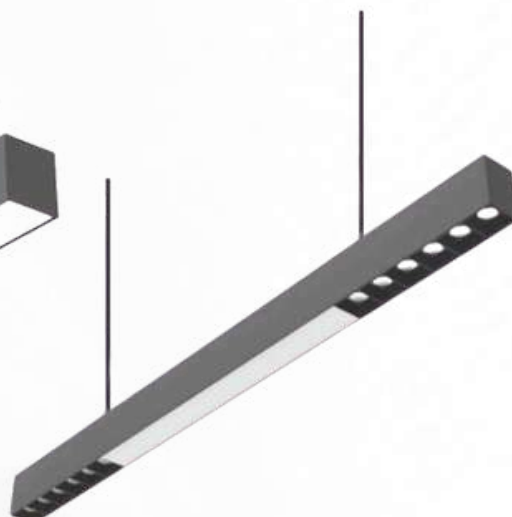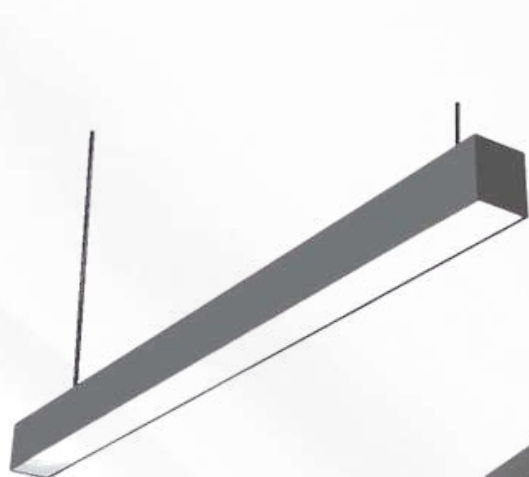

LINEAR LIGHT

HALF LASER LINEAR LIGHT

LASER LINEAR LIGHT

Product Variants

Model No: OD-CD-070
Material: Aluminium & Acrylic
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Profile Size: 50 X 70MM
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
600MM	20W
1200MM	40W
1800MM	60W
2400MM	80W
3600MM	120W

Product Variants

Model No: OD-CD-071
Material: Aluminium & Acrylic
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Profile Size: 35 X 70MM
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
1200MM	20W+ 2W X 10LED
1800MM	40W+ 2W X 10LED
2400MM	60W+ 2W X 10LED

Product Variants

Model No: OD-CD-072
Material: Aluminium & Acrylic
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Profile Size: 35 X 70MM
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
1200MM	1W X 45LED
1800MM	1W X 70LED
2400MM	1W X 90LED





SQUARE LINEAR LIGHT

Product Variants

Model No: OD-CD-073
Material: Aluminium & Acrylic
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Profile Size: 50 X 70MM
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
300 X 300MM	40W
600 X 600MM	80W
1200 X 1200MM	120W
1800 X 1800MM	240W

RECTANGLE LINEAR LIGHT

Product Variants

Model No: OD-CD-074
Material: Aluminium & Acrylic
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Profile Size: 50 X 70MM
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
600 X 300MM	60W
900 X 450MM	90W
1200 X 600MM	120W
1500 X 750MM	150W
1800 X 900MM	180W

'Y' SHAPE LINEAR LIGHT

Product Variants

Model No: OD-CD-075
Material: Aluminium & Acrylic
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Profile Size: 35 X 70MM
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
300 x 300 x 300MM	30W
600 x 600 x 600MM	60W
900 x 900 x 900MM	90W
1200 x 1200 x 1200MM	120W





DONUT LIGHT

Product Variants

Model No: OD-CD-076
Material: Aluminium
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
300 (W-50 X H-50)	30W
450 (W-50 X H-50)	36W
600 (W-50 X H-50)	40W
750 (W-75 X H-50)	50W
900 (W-75 X H-50)	80W
1200 (W-75 X H-50)	120W
1500 (W-75 X H-50)	150W




HEXA DONUT LIGHT

Product Variants

Model No: OD-CD-077
Material: Aluminium
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
300 (W-50 X H-50)	30W
450 (W-50 X H-70)	45W
600 (W-50 X H-70)	60W
750 (W-50 X H-70)	75W
900 (W-50 X H-70)	90W
1200 (W-50 X H-70)	120W
1500 (W-50 X H-70)	150W

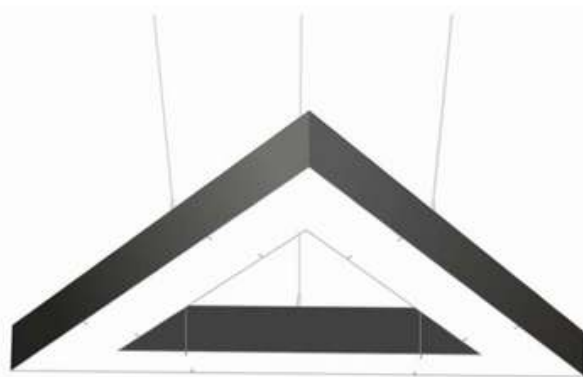

TRIANGULAR DOONUT LIGHT

Product Variants

Model No: OD-CD-078
Material: Aluminium
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
300 (W-50 X H-50)	30W
450 (W-50 X H-70)	45W
600 (W-50 X H-70)	60W
750 (W-50 X H-70)	75W
900 (W-50 X H-70)	90W
1200 (W-50 X H-70)	120W
1500 (W-50 X H-70)	150W






DRUM LIGHT

Product Variants

Model No: OD-CD-079
Material: Aluminium
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
300 (H-50)	30W
450 (H-50)	36W
600 (H-50)	40W
750 (H-50)	50W
900 (H-50)	80W
1200 (H-50)	120W

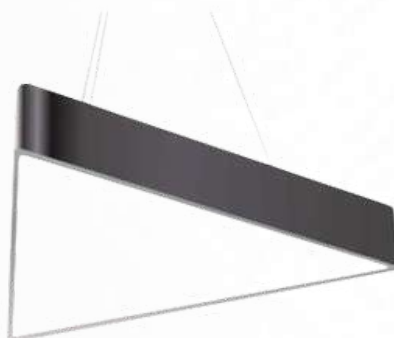


RECTANGLE LINEAR LIGHT

Product Variants

Model No: OD-CD-080
Material: Aluminium
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
300 (H-75)	30W
450 (H-75)	36W
600 (H-75)	40W
750 (H-75)	50W
900 (H-75)	80W
1200 (H-75)	120W

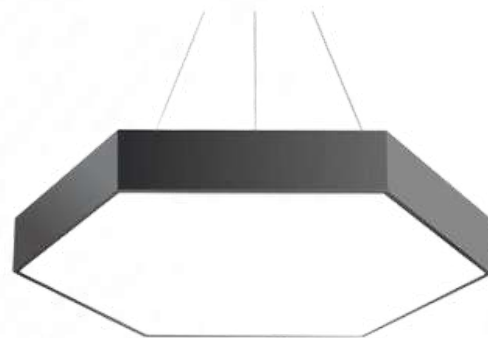

HEXALIGHT

Product Variants

Model No: OD-CD-081
Material: Aluminium
Led Color: 3000k / 4000k / 6000k
Body Color: Black / White / Grey
Mounting:- Suspended & Surface

Standard Available Size & Watt

Size:	Watt
300 (H-75)	30W
450 (H-75)	36W
600 (H-75)	40W
750 (H-75)	50W
900 (H-75)	80W
1200 (H-75)	120W



LED SPOTLIGHT (Moveable)




Product Variants

Model No.	Wattage	Dimensions	Height	Cutout
OD-CD-183	7W	Ø65 X H49MM	49MM	Ø55MM
OD-CD-184	12W	Ø65 X H64MM	64MM	Ø75MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3500K / 5000K / 6500K
- LUMEN EFFICIENCY: 120-140 LM/W
- REFLECTOR: SNOW WHITE / JET BLACK / GOLD / ROSE GOLD / CHROME / WHITE
WALL WASHER / CHROME WALL WASHER
- BODY COLOUR: BLACK GREY
- LED BEAM ANGLE: 25°
- IP: IP44



WIFI CONTROLLER REMOTE CONTROLLER APPLICATION CONTROLLER

SURFACE SQUARE COB




Product Variants

Model No.	Wattage	Diameter	Height
OD-CD-093	10W	74MM	95MM
OD-CD-094	12W	74MM	95MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 4000K / 6500K
- LUMEN EFFICIENCY: 120-140 LM/W
- LED BEAM ANGLE: 40°
- RING COLOUR: WHITE / BLACK / GOLDEN/ ROSE GOLD / CHROME
- BODY COLOUR: WHITE / BLACK
- MATERIAL: ALUMINIUM



SURFACE ROUND COB




Product Variants

Model No.	Wattage	Diameter	Height
OD-CD-095	7W	80MM	110MM
OD-CD-096	10W	80MM	150MM
OD-CD-097	12W	80MM	150MM
OD-CD-098	15W	80MM	180MM
OD-CD-099	18W	80MM	180MM


Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 4000K / 6500K
- LUMEN EFFICIENCY: 120-140 LM/W
- LED BEAM ANGLE: 40°
- RING COLOUR: WHITE / BLACK / GOLDEN/ ROSE GOLD / CHROME
- BODY COLOUR: WHITE / BLACK
- MATERIAL: ALUMINIUM





360° ADJUSTABLE SURFACE COB



360° ADJUSTABLE SURFACE COBHHT




360° Adjustable COB Track Light Luxury Lighting Decor for Modern Homes

The 360° Adjustable COB Spotlight offers versatile lighting with full rotation, energy-efficient COB technology, and sleek design. Ideal for accentuating spaces, it provides focused illumination for both residential and commercial areas.

Product Variants


Model No.	Wattage	Dimensions
OD-CD-100	10W	70 X 97MM
OD-CD-101	20W	95 X 110MM
OD-CD-102	30W	110 X 115MM



PANEL LIGHT



PANEL LIGHT

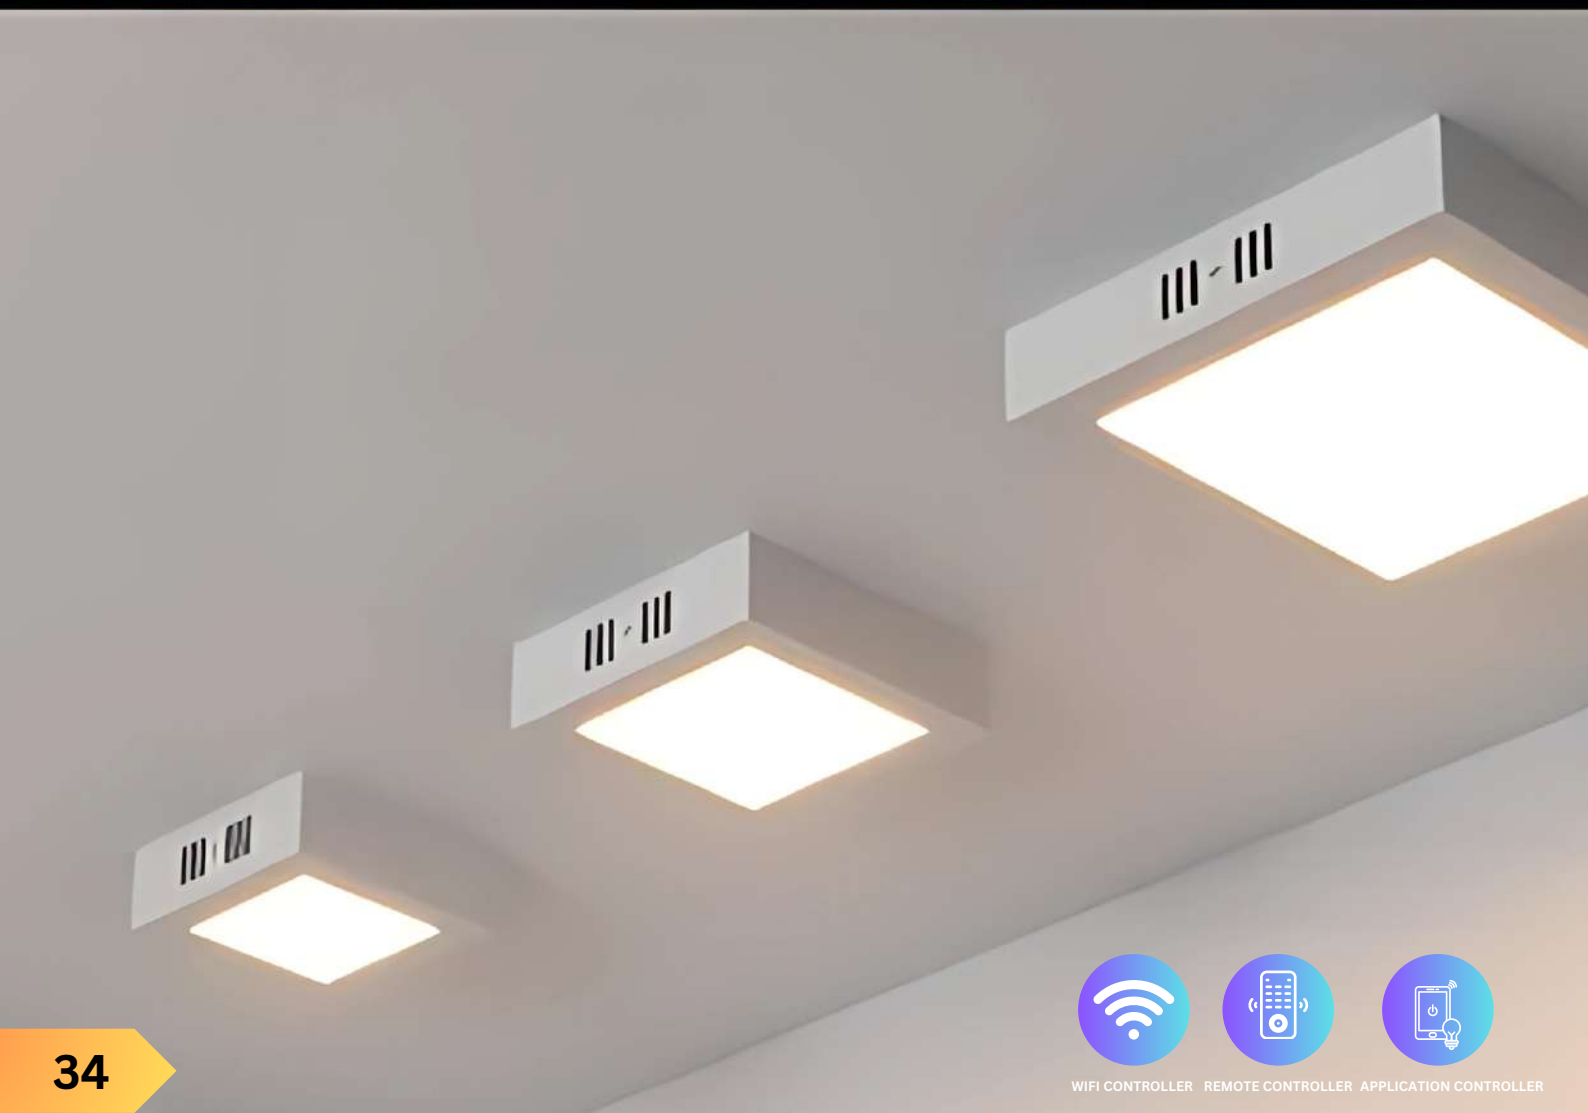

ROUND DEEP DOWN LIGHT PANEL




Product Variants

Model No.	Wattage	Outer Size	Cutout
OD-DL-001	12W	120MM	110MM
OD-DL-002	15W	148MM	138MM
OD-CD-003	22W	170MM	160MM

Additional Specifications

- LED: BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 3000K / 4000K / 6500K
- LUMEN EFFICIENCY: 100LM/W
- MATERIAL: ALUMINIUM DIE CASTING



SQUARE DEEP DOWN LIGHT PANEL




Product Variants

Model No.	Wattage	Outer Size	Cutout
OD-DL-004	12W	110x110MM	100x100MM
OD-DL-005	15W	143x143MM	133x133MM
OD-CD-006	22W	165x165MM	155x155MM

Additional Specifications

- LED: BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 3000K / 4000K / 6500K
- LUMEN EFFICIENCY: 100LM/W
- MATERIAL: ALUMINIUM DIE CASTING



ROUND PANEL LIGHTS




Product Variants

Model No.	Wattage	Outer Size	Cutout
OD-CD-155	8W	100MM	120MM
OD-CD-156	12W	125MM	145MM
OD-CD-157	18W	150MM	170MM
OD-CD-158	24W	175MM	195MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 3000K / 4000K / 6500K
- LUMEN EFFICIENCY: 100LM/W
- MATERIAL: ALUMINIUM DIE CASTING



SQUARE PANEL LIGHTS




Product Variants

Model No.	Wattage	Diameter	Cutout
OD-CD-159	8W	120MM	100 X 100MM
OD-CD-178	12W	145MM	125 X 125MM
OD-CD-179	18W	170MM	150 X 150MM
OD-CD-180	24W	195MM	175 X 175MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 3000K / 4000K / 6500K
- LUMEN EFFICIENCY: 100LM/W
- MATERIAL: ALUMINIUM DIR CASTING






OUTDOOR

A modern landscape lighting fixture, consisting of a black cylindrical top and a silver pole, is positioned next to a large, rounded, green manicured hedge. The fixture is illuminated from below, casting a warm, golden glow onto a light-colored stone or concrete path that runs alongside the hedge. The background is dark, suggesting a nighttime setting. The overall scene is a high-quality photograph used for a lighting catalog.

LIGHTS


OUTDOOR WALL LIGHT

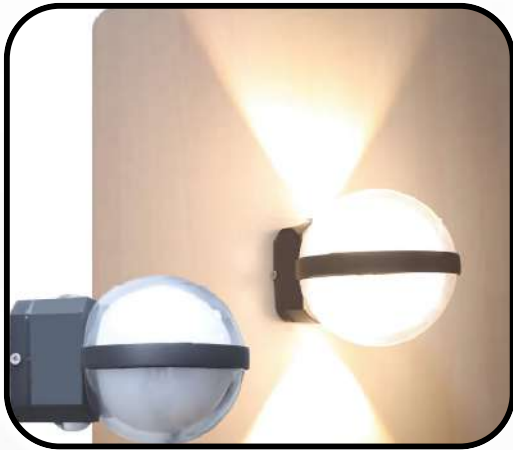

Model No.	OD-CD-181
Wattage	12W
Size	H90XW100XD130MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum



Model No.	OD-CD-182
Wattage	5W
Size	H180XW160XD110MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum

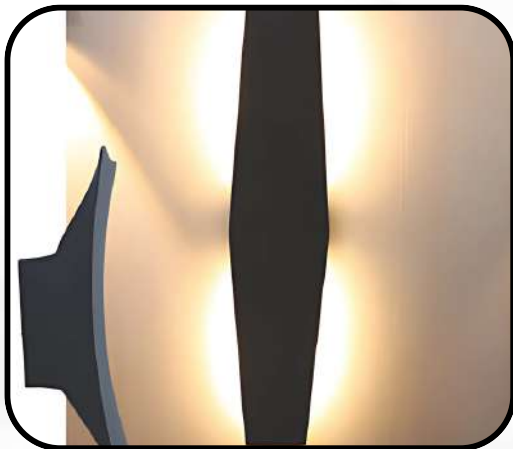

Model No.	OD-CD-183
Wattage	12W
Size	H340XW80XD40MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum



Model No.	OD-CD-184
Wattage	2X5W
Size	H292XW100XD50MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum


OUTDOOR WALL LIGHT



Model No.	OD-CD-185
Wattage	5W
Size	H180XW180XD35MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum



Model No.	OD-CD-186
Wattage	2X5W
Size	H231XW86XD71MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum

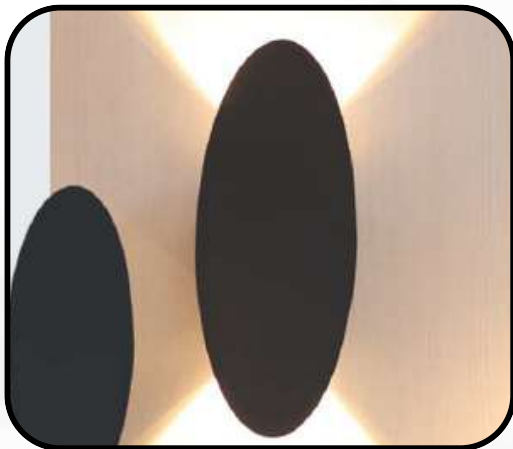

Model No.	OD-CD-187
Wattage	2X3W
Size	H232XW98XD55MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum



Model No.	OD-CD-188
Wattage	5W
Size	H190XW150XD50MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum

OUTDOOR WALL LIGHT



Model No.	OD-CD-189
Wattage	2X5W
Size	H180XW190XD50MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum



Model No.	OD-CD-190
Wattage	6W
Size	H240XW56XD42MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum



Model No.	OD-CD-191
Wattage	10W
Size	H48XW78XD82MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum



Model No.	OD-CD-192
Wattage	2X3W
Size	H150XW62XD76MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum


OUTDOOR WALL LIGHT



Model No.	OD-CD-193
Wattage	22W
Size	H48XW295XD80MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum



Model No.	OD-CD-194
Wattage	2X3W
Size	H150XW66XD76MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum

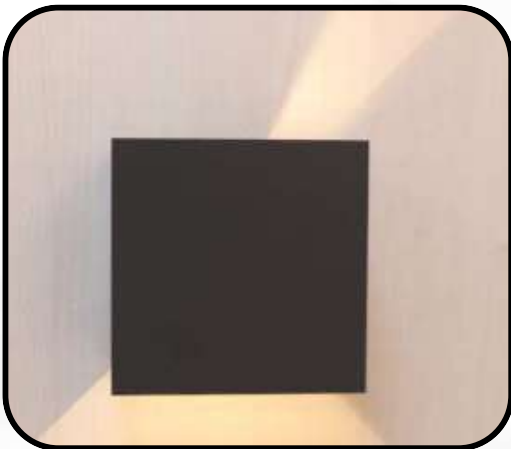

Model No.	OD-CD-195
Wattage	2X3W
Size	H100XW100XD100MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum



Model No.	OD-CD-196
Wattage	18W
Size	H85XW280XD99MM
Lumen	130LM/W
CCT	3000K
IP	65
Material	Aluminum

OUTDOOR WALL LIGHT



Product Discription

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class

Fastener

304 stainlesssteel.

IP

IP65



Model No.	LED Power	Voltage	Colour Temperature
OD-CD-161	1 X 10W	90-260V 50/60HZ	3000K / 6000K
OD-CD-162	2 X 10W	90-260V 50/60HZ	3000K / 6000K

OUTDOOR WALL LIGHT



MODEL NO: OD-CD-160

.....
LWA0259-300A
12W 300MA
.....



.....
LWA0259-500A
12W 400MA
.....



.....
LWA0259-500B
12W 400MA
.....



.....
LWA0259-900B
12W 500MA
.....



INGROUND LIGHT



INGROUND LIGHT



Product Discription

The in ground Up-Light collection is specifically designed to be versatile. ? Designers do not have to ask themselves whether an effect can be created, as anything is possible, in any dimension, application or environment, from residential to urban. These fixtures help illuminate sidewalks, bridges, passageways, footbridges, etc.

LUMEN: 130L/W CCT-3000K

IP: 65

MATERIAL: ALUMINIUM

Product Variants

Model No.	Size	Power
OD-CD-103	Ø65 H27MM Dimension Ø60	1W
OD-CD-104	Ø100 H80MM Dimension Ø95	3W
OD-CD-105	Ø120 H90MM Dimension Ø115	6W
OD-CD-106	Ø150* H90MM Dimension Ø125	9W
OD-CD-107	Ø160* H90MM Dimension Ø142	12W
OD-CD-108	Ø180* H90MM Dimension Ø155	15W



UNDER WATER LIGHT



UNDER WATER LIGHT



Product Discription

Our led underwater lights, fountain lights can be installed in parks, apartments, communities, hotels, large or small fountains, where water can be installed.

Product Variants

Model No.	Size	Power
OD-CD-108	Ø80* H100MM	3W
OD-CD-109	Ø120* H118MM	6W
OD-CD-110	Ø145* H150MM	9W
OD-CD-111	Ø160* H150MM	15W
OD-CD-112	Ø190* H150MM	18W

LUMEN: 130L/W CCT-3000K

IP: 65

MATERIAL: S.S



WALL WASHER



WALL WASHER



Product Discription

Be it a restaurant or your home, it's perfectly suited for every wall! This Outdoor Wall Washer adds life and beauty to your walls. This beautiful outdoor wall light is dimmable and is available in a variety of colours and adds an elegant charm to your walls.

Product Variants

Model No.	Size	Power
OD-CD-118	L1000*W32*H23MM	18W
OD-CD-119	L1000*W32*H23MM	18W
OD-CD-120	L1000*W40*H23MM	24W
OD-CD-121	L1000*W40*H23MM	24W
OD-CD-122	L1000*W40*H36MM	24W
OD-CD-123	L1000*W52*H36MM	48W
OD-CD-124	L1000*W50*H30MM	36W

CCT: 3000K / 4000K / 6000K / RGB

IP: 65

MATERIAL: ALUMINIUM

AQUA IP65



AQUA IP65



Product Variants

Model No.	Wattage	Dimensions	Height	Cutout
OD-CD-125	7-12W	85MM	70MM	75MM
OD-CD-126	12-18W	110MM	78MM	95MM
OD-CD-127	20-30W	135MM	91MM	125MM
OD-CD-128	36-50W	180MM	106MM	155MM
OD-CD-129	55-80W	242MM	140MM	220MM

Additional Specifications

- LED: CREE / BRIDGELUX
- DRIVER: PHILIPS / FULHAM / OSRAM
- COLOUR TEMP: 2700K / 3000K / 3500K / 4000K / 5000K / 6500K
- LENS: HERCULUX
- LED BEAM ANGLE: 24° / 36° / 55°
- LUMEN EFFICIENCY: 120-140 LM/W
- RING COLOUR: WHITE / MATT BLACK / CHROME / SHINING BLACK
- BODY COLOUR: WHITE / BLACK
- MATERIAL: ALUMINIUM DIE CASTING


BOLLARD LIGHT



BOLLARD LIGHT | IP65 | 3000K | ALUMINIUM
MODEL NO: OD-CD-130



GR0552-520A

Ø140 X 520MM
12W

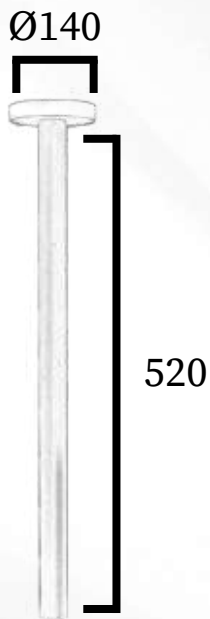

GR0552-820A

Ø140 X 820MM
12W

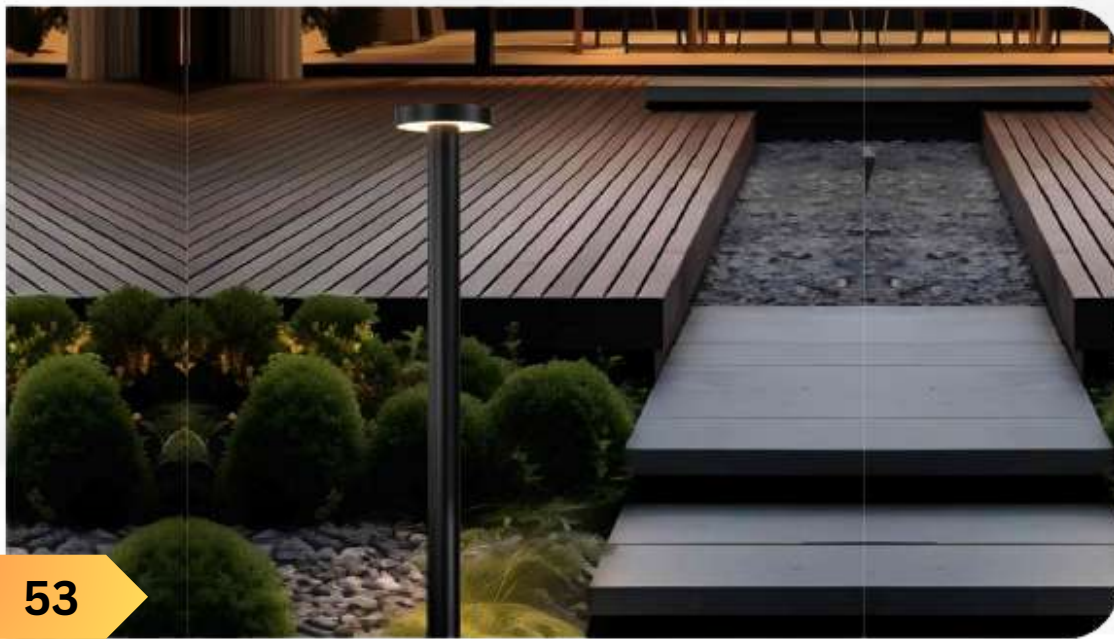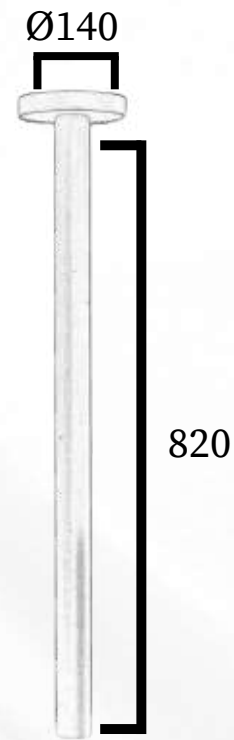

BOLLARD LIGHT



BOLLARD LIGHT | IP65 | 3000K | ALUMINIUM
MODEL NO: OD-CD-131

GR0546-350A




159 X 183 X 365
12W

GR0546-550A

159 X 183 X 565
12W

GR0546-800A

159 X 183 X 815
12W

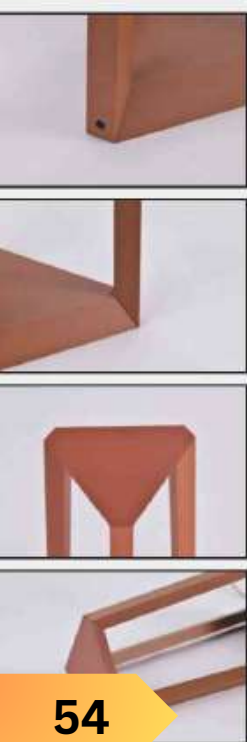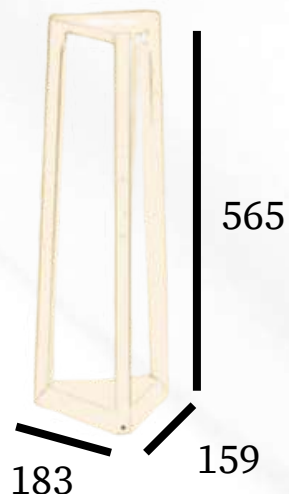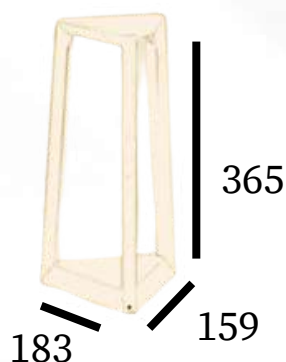

White



Blue



Grey



Black



Orange

LED BOLLARD LIGHT



Product Discription



IP: IP65

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

SIZE: 120MM X 80MM X 800MM

120MM X 80MM X 900MM

Model No.	LED Power	Voltage	Colour Temperature
OD-CD-132	1X5W	90-260V 50/60HZ	3000K / 6000K
OD-CD-133	1X10W	90-260V 50/60HZ	3000K / 6000K

LED BOLLARD LIGHT



IP: IP65

Product Discription

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

PMMA

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

SIZE: 157MM X 600MM

157MM X 900MM

Model No.	LED Power	Voltage	Colour Temperature
OD-CD-136	10W	90-260V 50/60HZ	3000K / 6000K





Product Variants

Model No.	Size	Power
OD-CD-113	Ø95 H130MM	5W
OD-CD-114	Ø130 H130MM	9W
OD-CD-115	Ø150 H150MM	12W
OD-CD-116	Ø180 H180MM	15W
OD-CD-117	Ø230 H210MM	24W

LUMEN: 130L/W CCT-3000K

IP: 65

MATERIAL: S.S




OUTDOOR LIGHTING




OUTDOOR LIGHTING|36,300MA | 3000K | ALUMINIUM
MODEL NO: OD-CD-154


GR0551-1500A
Ø40*H1500MM
12W

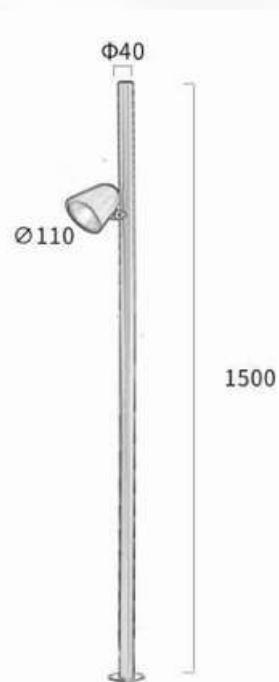

GR0551-2000A
Ø40*H2000MM
12W

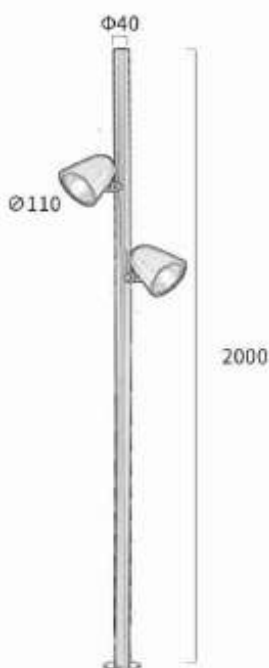

GR0551-2000A
Ø40*H2000MM
12W

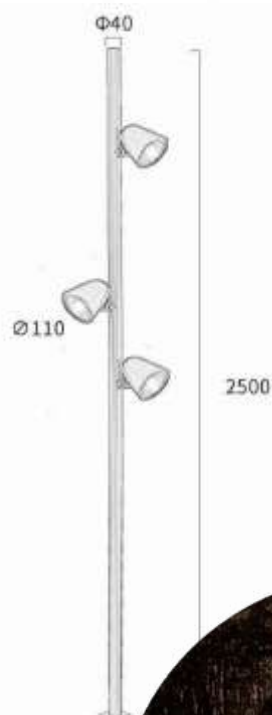

LED PATHWAY LIGHT



Product Discription



Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear glass

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.

IP: IP65

**SIZE: 162MM X 100MM X 700MM
120MM X 80MM X 900MM**

Model No.	LED Power	Voltage	Colour Temperature
OD-CD-134	1X5W	90-260V 50/60HZ	3000K / 6000K
OD-CD-135	1X10W	90-260V 50/60HZ	3000K / 6000K



LED PATHWAY LIGHT



Product Discription

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

PMMA

Gasketing

Made of thermostable silica gel to improve protection class.

Fastener

304 stainless steel.



IP: IP65

SIZE: 157MM X 600MM

120MM X 900MM

Model No.	LED Power	Voltage	Colour Temperature
OD-CD-137	5W	90-260V 50/60HZ	3000K / 6000K
OD-CD-138	10W	90-260V 50/60HZ	3000K / 6000K



BOLLARD LAMP



BOLLARD LAMP | IP65 | 3000K

MODEL NO: OD-CD-139

.....
GR0876-1000A

Ø38*H1000MM
16W



.....
GR0876-600B

Ø38*H600MM
16W



.....
GR0876-600A

Ø38*H600MM
8W



Black



White



Dark Grey

BOLLARD LAMP




BOLLARD LAMP | IP65 | 3000K

MODEL NO: OD-CD-140

GR0553-600A

Ø120*H600MM
12W



600

GR0553-900A

Ø120*H900MM
18W




900

GR0553-1200A

Ø120*H1200MM
24W



1200



BOLLARD LAMP



BOLLARD LAMP | IP65 | 3000K

MODEL NO: OD-CD-141

GR0260-600A

12W

GR0260-900A



12W

GR0260-600B

12W

GR0260-900B

12W

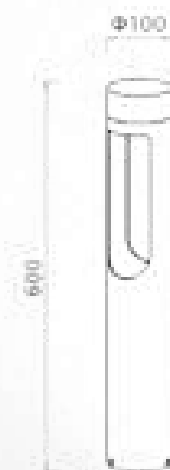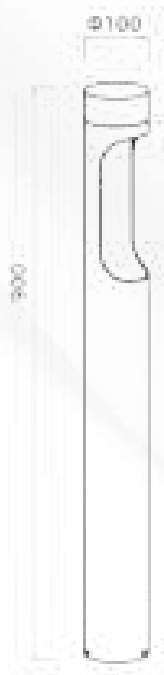

**Enlightenment
From Nature,
Light Penetration**



BOLLARD LAMP



BOLLARD LAMP | IP65 | 3000K

MODEL NO: OD-CD-142

GR0261-400A

12W

GR0261-600A


12W

GR0261-900A

12W

GR0261-2200A

20W



**Enlightenment From Nature,
Light Penetration**



BOLLARD LAMP



BOLLARD LAMP | IP65 | 3000K

MODEL NO: OD-CD-143


GR0261-400B

12W




GR0261-600B

12W

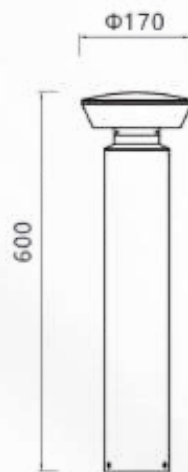

GR0261-900B

12W

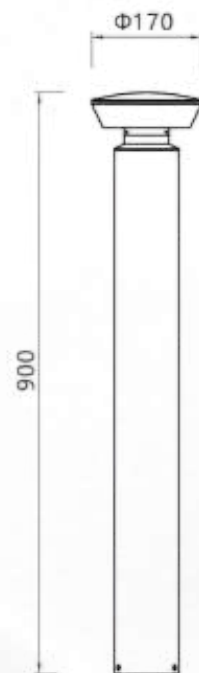

**Enlightenment
From Nature,
Light Penetration**




BOLLARD LAMP




BOLLARD LAMP | IP65 | 3000K

MODEL NO: OD-CD-144

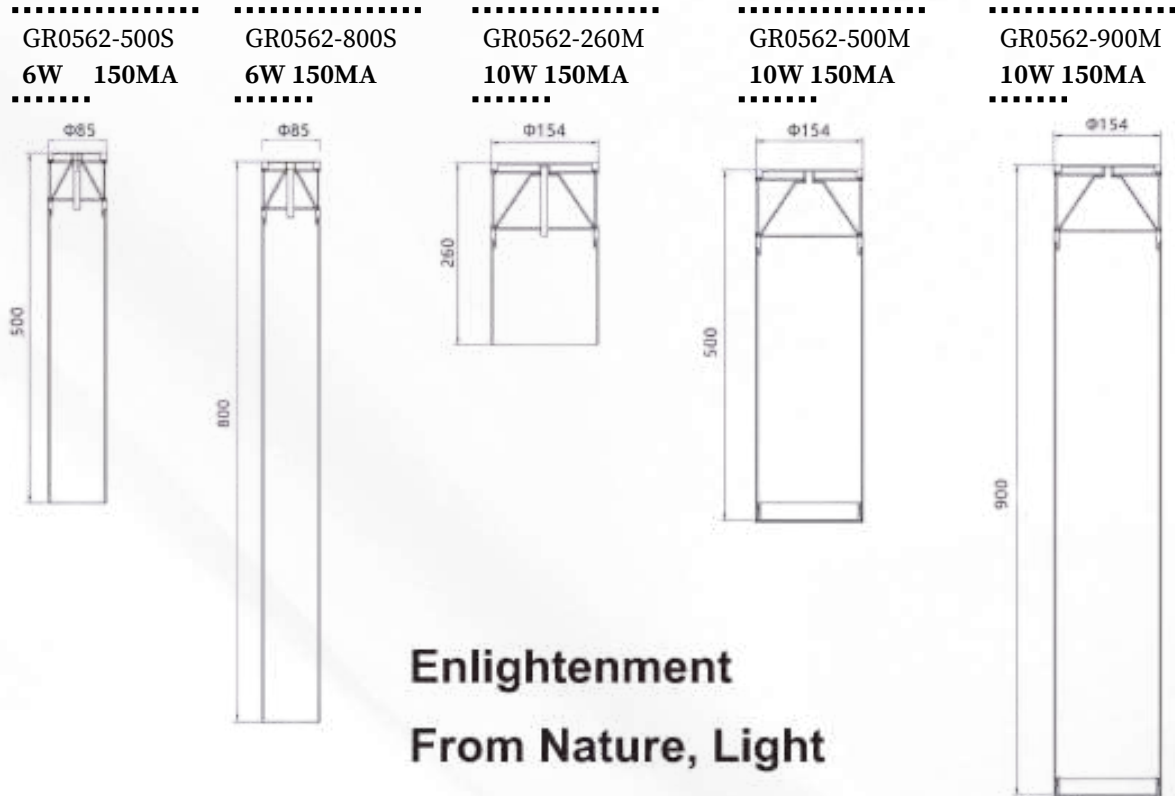

**Enlightenment
From Nature, Light
Penetration**

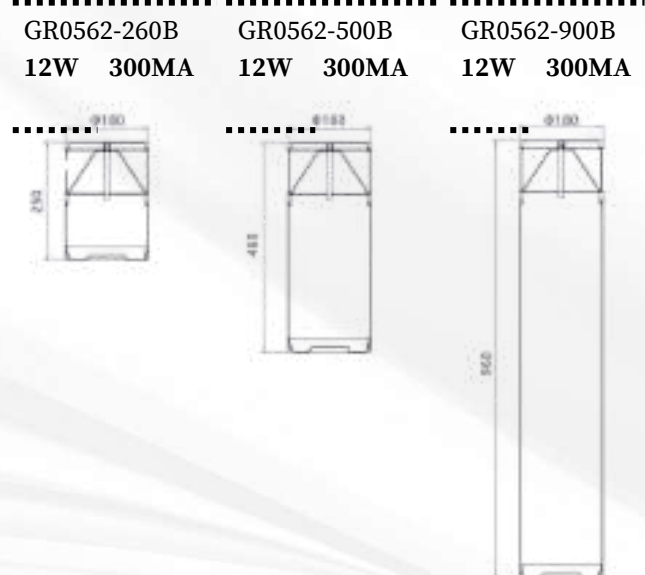

BOLLARD LAMP




BOLLARD LAMP | IP65 | 3000K

MODEL NO: OD-CD-145


GR0563-900M
10W 250MA



GR0563-260M
10W 250MA




GR0563-500M
10W 250MA




GR0562-960M
12W 300MA



GR0562-250M
12W 300MA



GR0562-460M
12W 300MA

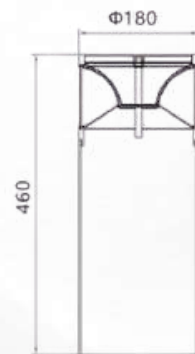

**Enlightenment
From Nature,
Light Penetration**



GARDEN LIGHT



Product Discription

Body

Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser


Clear glass

Fastener

304 stainless steel.

IP

IP65

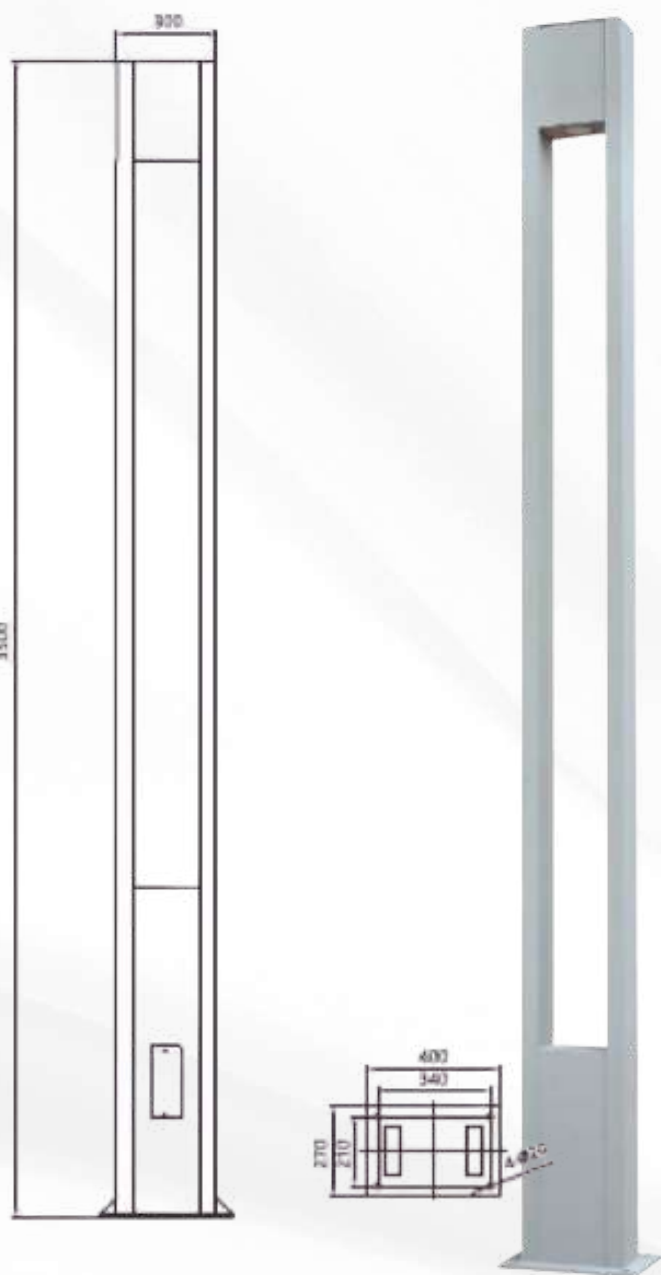

Model No.	LED Power	Voltage	Colour Temperature
OD-CD-148	40N	90-260V 50/60HZ	3000K / 6000K

GARDEN LIGHT



Product Discription

Body

Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser


Clear glass

Fastener

304 stainlesssteel.

IP

IP65

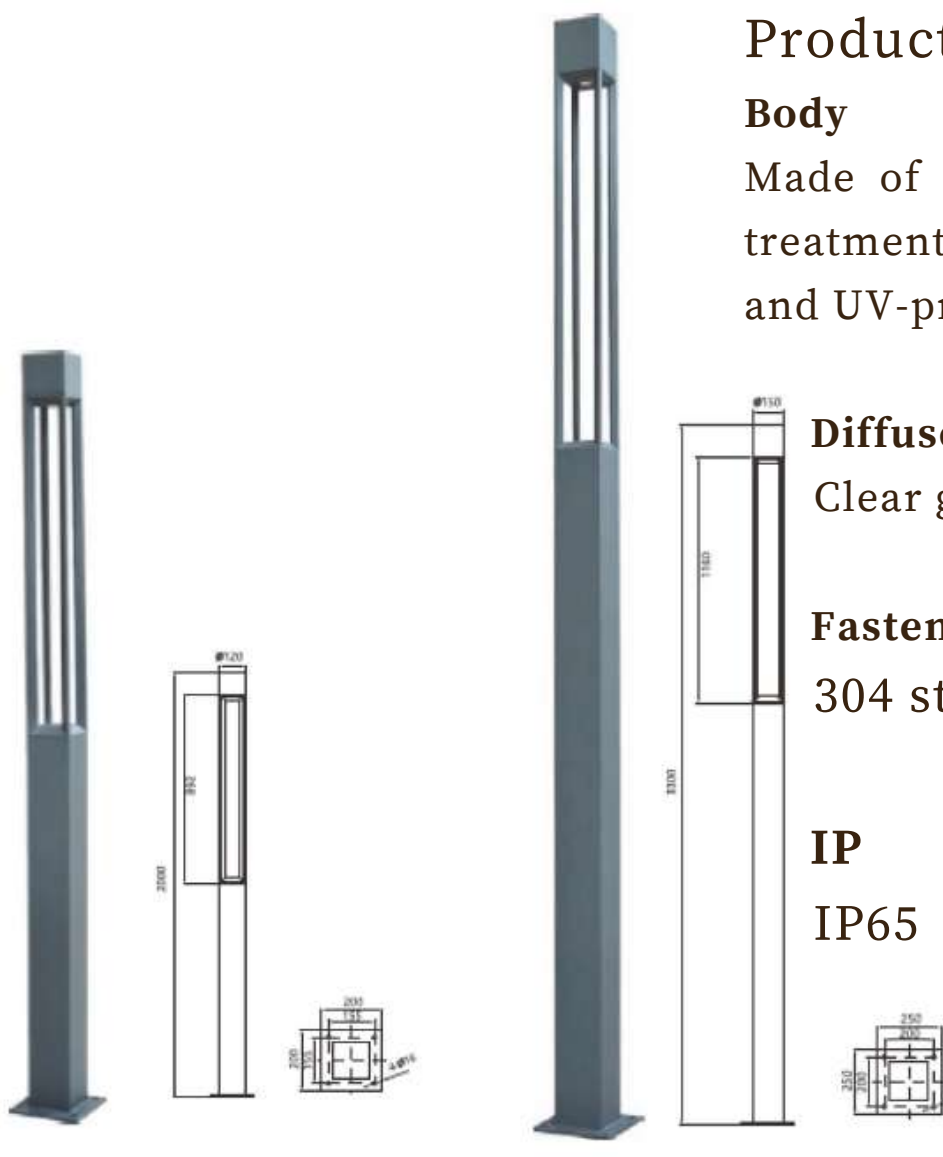

Model No.	LED Power	Voltage	Colour Temperature
OD-CD-149	21W	90-260V 50/60HZ	3000K / 6000K
OD-CD-150	30W	90-260V 50/60HZ	3000K / 6000K

GARDEN LIGHT



Product Discription

Body

Made of stainless steel with treatment of corrosion protection and UV-proof powder coating.

Diffuser



PMMA

Fastener

304 stainless steel.

IP

IP65

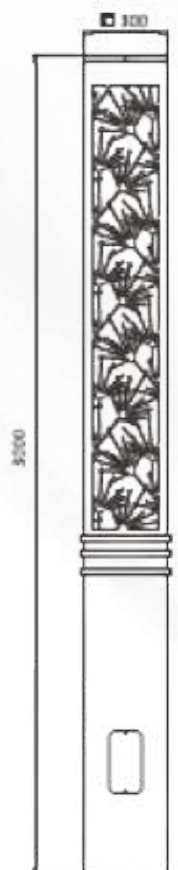

Model No. LED Power

Voltage

Colour Temperature

OD-CD-151

45W

90-260V 50/60HZ

3000K / 6000K

GARDEN LIGHT



Product Discription

Body

Made of stainless steel with treatment of corrosion protection and UV-proof powder coating.

Diffuser

PMMA

Fastener

304 stainless steel.

IP

IP65



Model No.	LED Power	Voltage	Colour Temperature
OD-CD-152	30-30W	90-260V 50/60HZ	3000K / 6000K

GARDEN LIGHT



Product Discription

Body

Made of extruded aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser


Clear glass

Fastener

304 stainless steel.

IP

IP65

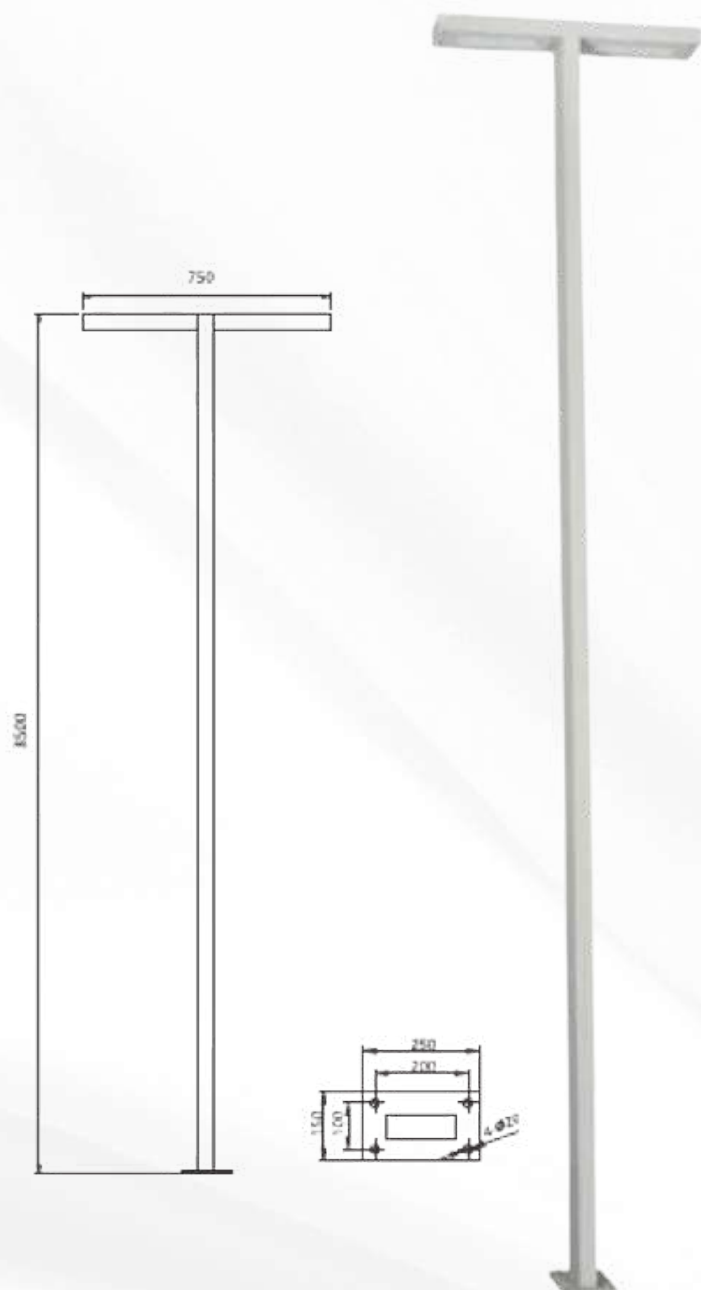

Model No.	LED Power	Voltage	Colour Temperature
OD-CD-153	30W X 2	90-260V 50/60HZ	3000K / 6000K

LED STEP LIGHT



Product Discription

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear tempered glass

Gasketing

Made of thermostable silica gel to improve protection class

Fastener

304 stainlesssteel.

IP

IP65



Model No.	LED Power	Voltage	Colour Temperature
OD-CD-163	2.8W	240V	3000K
OD-CD-164	2.8W	240V	3000K

LED STEP LIGHT



Product Discription

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear tempered glass

Gasketing

Made of thermostable silica gel to improve protection class



Fastener

304 stainlesssteel.

IP

IP65



Model No.	LED Power	Voltage	Colour Temperature
OD-CD-164	1.8W	240V	3000K
OD-CD-165	2.3W	240V	3000K
OD-CD-166	2.3W	240V	3000K

LED STEP LIGHT



Product Discription

Body

Made of cast aluminum with treatment of corrosion protection and UV-proof powder coating.

Diffuser

Clear tempered glass

Gasketing


Made of thermostable silica gel to improve protection class

Fastener

304 stainlesssteel.

IP

IP65

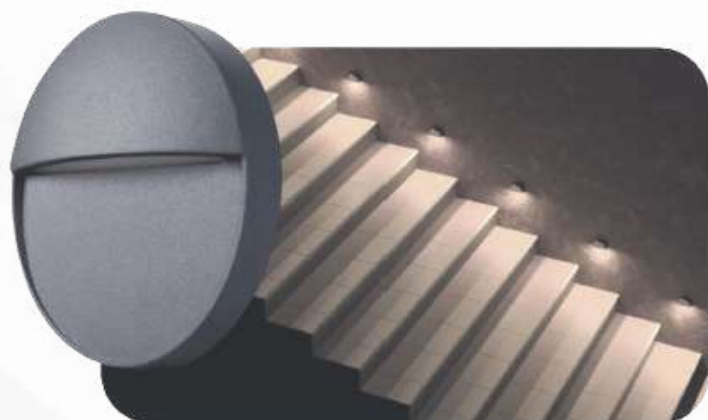

Model No.	LED Power	Voltage	Colour Temperature
-----------	-----------	---------	--------------------

OD-CD-167	8W	90-26V 50/60HZ	3000K / 6000K
OD-CD-168	8W	90-26V 50/60HZ	3000K / 6000K

SPIKE LIGHT



LAMP SOURCE: GU/10COB


CRI: 80

IP: 65

CCT(K): 3000K / 6000K

MATERIAL: DIE ALUMINIUM

INPUT VOLTAGE(V):- AC85-26

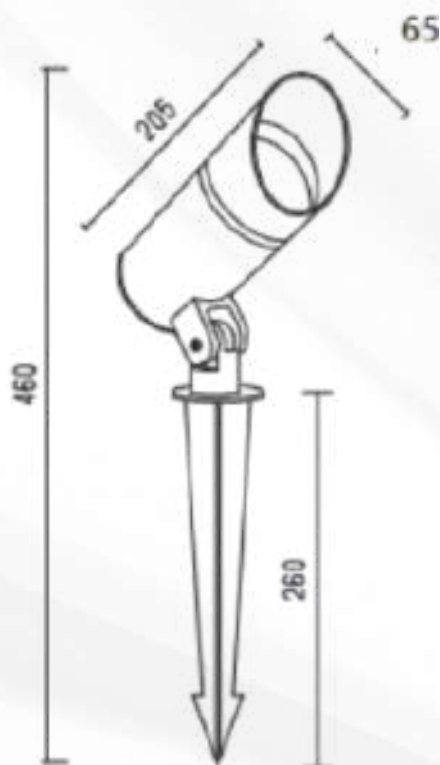

Model No.	Power	Voltage	Beam Angle
OD-CD-169	5W	Ø65 X 185 X 380	38°
OD-CD-170	10W	Ø65 X 205 X 380	15°/24° 38°/4° 5°/60°
OD-CD-171	20W	Ø76 X 205 X 380	15°/24° 38°/4° 5°/60°

SPIKE LIGHT



LAMP SOURCE: GU/10COB

CRI: 80

IP: 65


CCT(K): 3000K / 6000K

MATERIAL: DIE ALUMINIUM

INPUT VOLTAGE(V):- AC85-265/AC220-240/DC12V/
DC24V

Model No.	Power	Voltage	Beam Angle
OD-CD-172	5W	Ø65*130MM	38°
OD-CD-173	10W	Ø65*195MM	15°/24° 38°/4° 5°/60°
OD-CD-174	20W	Ø76*195MM	15°/24° 38°/4° 5°/60°

SPIKE LIGHT

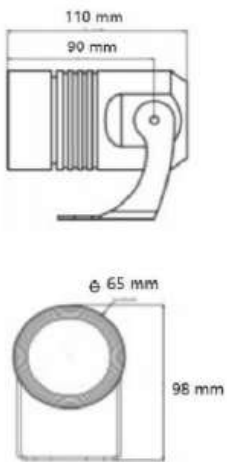

LAMP SOURCE: LED CREE

CRI: 80

IP: 65

CCT(K): 3000K / 6000K, R/G/B

MATERIAL: DIE ALUMINIUM

INPUT VOLTAGE(V):- AC220/DC24V

Model No.	Power	Voltage	Beam Angle
OD-CD-173	3W	Ø65*90*97.5MM	10°/30° 45°/60°
OD-CD-174	6W	Ø65*110*97.5MM	10°/30° 45°/60°
OD-CD-175	9W	Ø65*110*97.5MM	10°/30° 45°/60°



OCEAN DEEP
SHINE THE WORLD



**Shop no. 52 second floor.
Agarval naka sativali rode
Vasai East.**



**SHYAM TIWARI
+91 9156105200 / +91 8176865200**



www.oceandeeplights.com



sale@oceandeeplights.com